


NEW PRODUCTS TECNOTELAI PROMOTION



GUARD-RAIL AND POST

Bumper system used to protect racks, walls, and machinery from impacts with moving vehicles such as forklifts and pallet trucks. Made of rigid polyurethane, resistant to temperatures from -30° C to +100° C, the guardrail and post are anchored to the floor with steel bars that ensure extremely high impact resistance. The protective bumpers are complementary safety products for the racks, as required by Italian Legislative Decree 81/08 and UNI 15635.

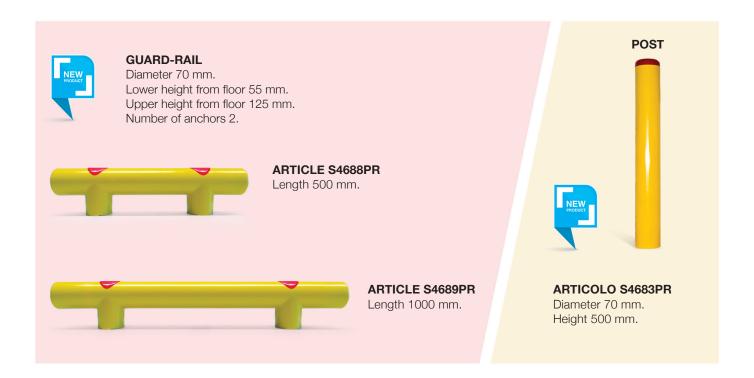



PERIMETER MESH FENCING

Modular system in **electrowelded mesh** to cordon off access areas and protect machines in motion.

The mesh panels, with vertical wires welded on the outside, prevent climbing according to the specifications required by UNI 14120; where set forth in the project, the uprights ensure CE conformity based on the Machinery Directive 42/2006.





Containment Dam

Flexible polyurethane dam, useful for stemming leaks and deflecting liquids. The 45° cut allows several pieces to be added without the need for special accessories. Resistant to hydrocarbons and most acids except for nitric and hydrochloric acids.



ARTICLE 0885PR Width 2000 mm. Depth 50 mm. Height 50 mm.

WATERTIGHT TANKS FOR DRUMS

Made of hot dip galvanized steel sheet metal that complies with European safety standards.

Can be inserted empty, without the grill and grid support profiles. The support surfaces are hot dip galvanized, made in 30×2 mm plate and make a grid with a mesh of 44×33 mm.

Can be moved with a forklift.



ARTICLE 0802PR

Dimensions (L x W x H mm) 1200 x 800 x 240 + 100 Number of Tanks 2x200 I Tank Capacity 214 I Weight capacity 460 kg



ARTICLE 0804PR

Dimensions (L x W x H mm) 1200 x 1200 x 200 + 100 Number of Tanks 4x200 I Tank Capacity 270 I Weight capacity 920 kg





Anti-fatigue Mat

Anti-fatigue mat, perfect for standing workstations in dry areas, ergonomic, made of polyurethane and resistant to temperatures from -40°C to +100°C. The special bubble surface stimulates blood circulation and reduces fatigue of the legs and spinal column. The surface is enclosed by descending edges on all sides.



ARTICLE P240PR
Dimensions (L x W x H mm)
800 x 600 x 14

WORKBENCHES

With layered beech surfaces, 30 mm. The benches can be accessorized with individual drawers or with 3-drawer units, all of which slide on simple runners with ball bearings and with locks. Kiln-baked epoxy-polyester powder coating.



DISMANTLEABLE BENCHES WITH WOOD SURFACES

ARTICLE BM302PR Dimensions (L x W x H mm) 2000 x 750 x 880 Capacity 750 kg

DRAWER UNITS FOR WORKBENCHES

Working dimensions of drawers: (L x W x H mm) 390 x 460 x 120



ARTICLE BL311PR

3-drawer unit with screws and locks with simultaneous closure Dimensions (L x W x H mm) 500 x 565 x 620



ARTICLE BL310PR

Hanging cabinet with angle bracket upper mounting, screws, and lock Dimensions (L x W x H mm) 500 x 520 x 200



Via Bonazzi, 4 40013 Castel Maggiore (BO) Tel. +39 051 700096 Fax +39 051 700175 info@tecnotelai.it www.tecnotelai.eu